

OWNER'S MANUAL

MODEL NO.
16607608950
XE895

- Assembly
- Operation
- Maintenance
- Parts
- Warranty

CAUTION:

You must read and understand this owner's manual before operating unit.

SPIRIT



Retain For Future Reference

TABLE OF CONTENTS

- Important Safety Instructions..... 3
- Important Electrical Instructions..... 4
- Important Operation Instructions..... 5
- Assembly Instructions..... 7
- Operation of Your Elliptical..... 14
- Programmable Features..... 19
- Using A Heart Rate Transmitter..... 26
- Using The Spirit Fit App 28
- Exploded Diagram..... 29
- Parts List..... 30
- General Maintenance..... 36
- Manufacturer’s Limited Warranty..... 37

SPIRIT

**CONGRATULATIONS ON YOUR
NEW ELLIPTICAL**

Thank you for your purchase of this quality elliptical from Dyaco Canada Inc. Your elliptical was manufactured by one of the leading fitness manufacturers in the world and is backed by one of the most comprehensive warranties available. Through your dealer, Dyaco Canada Inc. will do all we can to make your ownership experience as pleasant as possible for many years to come. The local dealership where you purchased this elliptical is your administrator for all warranty and service needs. Their responsibility is to provide you with the technical knowledge and service personnel to make your experience more informed and any difficulties easier to remedy.

Please take a moment at this time to record the name of the dealer, their telephone number, and the date of purchase below to make any future, needed contact easy. We appreciate your support and we will always remember that you are the reason that we are in business. Please complete and mail your registration card today and enjoy your new elliptical.

Name of Dealer _____
Telephone Number of Dealer _____
Purchase Date _____

Product Registration

RECORD YOUR SERIAL NUMBER

Please record the Serial Number of this fitness product in the space provided below.

Serial Number _____

REGISTER YOUR PURCHASE

The self-addressed product registration card must be completed in full and returned to Dyaco Canada Inc.

IMPORTANT SAFETY INSTRUCTIONS

WARNING - Read all instructions before using this equipment.

DANGER - To reduce the risk of electric shock disconnect your elliptical from the electrical outlet prior to cleaning and/or service work.

WARNING - To reduce the risk of burns, fire, electric shock, or injury to persons, install the elliptical on a flat level surface with access to a 110-volt, 15-amp grounded outlet with only the elliptical plugged into the circuit.

DO NOT USE AN EXTENSION CORD UNLESS IT IS A 14 AWG OR BETTER, WITH ONLY ONE OUTLET ON THE END:

1. Do not operate elliptical on deeply padded, plush or shag carpet. Damage to both carpet and elliptical may result.
2. Before beginning this or any exercise program, consult a physician. This is especially important for persons over the age of 35 or persons with pre-existing health conditions.
3. Keep children away from the elliptical. There are obvious pinch points and other caution areas that can cause harm.
4. Keep hands away from all moving parts.
5. Never operate the elliptical if it has a damaged cord or plug. If the elliptical is not working properly, call your dealer.
6. Keep the cord away from heated surfaces.
7. Do not operate where aerosol spray products are being used or where oxygen is being administered. Sparks from the motor may ignite a highly gaseous environment.
8. Never drop or insert any object into any openings.
9. Do not use outdoors.
10. To disconnect, turn all controls to the off position, then remove the plug from the outlet.
11. Do not attempt to use your elliptical for any purpose other than for the purpose it is intended.
12. The hand pulse sensors are not medical devices. Their purpose is to provide you with an approximate measurement in relation to your target heart rate. Use of a chest transmitter strap (sold separately) is a much more accurate method of heart rate analysis. Various factors, including the user's movement, may affect the accuracy of heart rate readings. The pulse sensors are intended only as exercise aids in determining heart rate trends in general.
13. Method of heart rate analysis. Various factors, including the user's movement, may affect the accuracy of heart rate readings. The pulse sensors are intended only as exercise aids in determining heart rate trends in general.
14. Wear proper shoes. High heels, dress shoes, sandals or bare feet are not suitable for use on your elliptical. Quality athletic shoes are recommended to avoid leg fatigue.
15. Maximum User Weight: 400 lbs.

Failure to follow all guidelines may compromise the effectiveness of the exercise experience, expose yourself (and possibly others) to injury, and reduce the longevity of the equipment.

SAVE THESE INSTRUCTIONS - THINK SAFETY!

IMPORTANT ELECTRICAL INSTRUCTIONS

WARNING!

NEVER remove any cover without first disconnecting AC power. If voltage varies by ten percent (10%) or more, the performance of your elliptical may be affected. Such conditions are not covered under your warranty. If you suspect the voltage is low, contact your local power company or a licensed electrician for proper testing.

NEVER expose this elliptical to rain or moisture. This product is **NOT** designed for use outdoors, near a pool or spa, or in any other high humidity environment. The operating temperature specification is 5 to 48 degrees Celsius (40 to 120 degrees Fahrenheit), and humidity is 95 non-condensing (no water drops forming on surfaces).

Circuit Breakers: Some circuit breakers used in homes are not rated for high inrush currents that can occur when an elliptical is first turned on or even during use. If your elliptical is tripping the house circuit breaker (even though it is the proper current rating) but the circuit breaker on the elliptical itself does not trip, you will need to replace the home breaker with a high inrush type. This is not a warranty defect. This is a condition we as a manufacture have no ability to control. This part is available through most electrical supply stores. Examples: Grainger part # 1D237, or available online at www.squared.com part #QO120HM. The electrical outlet used should have a dedicated 15 amp circuit breaker

IMPORTANT OPERATION INSTRUCTIONS


- **NEVER** operate this elliptical without reading and completely understanding the results of any operational change you request from the computer.
- Understand that changes in resistance do not occur immediately. Set your desired resistance level on the computer console and release the adjustment key. The computer will obey the command gradually.
- **NEVER** use your elliptical during an electrical storm. Surges may occur in your household power supply that could damage elliptical components. Unplug the elliptical during an electrical storm as a precaution.
- Use caution while participating in other activities while pedaling on your elliptical; such as watching television, reading, etc. These distractions may cause you to lose balance which may result in serious injury.
- Do not use excessive pressure on console control keys. They are precision set to function properly with little finger pressure.

Grounding Instructions

This product must be grounded. If your equipment should malfunction or breakdown, grounding provides a path of least resistance for electric current, reducing the risk of electric shock. This product is equipped with a cord having an equipment-grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.


DANGER - Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product if it will not fit the outlet; have a proper outlet installed by a qualified electrician.

This product is for use on a nominal 110-volt/15 amp dedicated circuit, and has a grounding plug that looks like the plug illustrated below. A temporary adapter that looks like the adapter illustrated below may be used to connect this plug to a 2-pole receptacle as shown below if a properly grounded outlet is not available. The temporary adapter should be used only until a properly grounded outlet, (shown below) can be installed by a qualified electrician. The green colored rigid ear-lug, or the like, extending from the adapter, must be connected to a permanent ground such as a properly grounded outlet box cover. Whenever the adapter is used, it must be held in place by a metal screw.

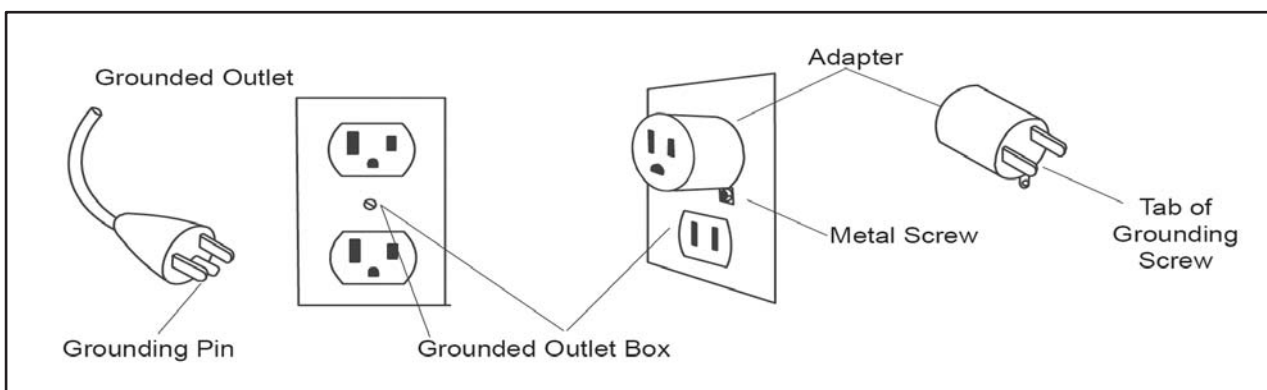

ELLIPTICAL LUBRICATION

1. Pour 2c.c of the lubricant under the middle of the rail. You must lubricate the rails every three months.
2. If you feel the exercise is not smooth or you hear noise during your exercise, lubricate the middle rail with 2c.c of the lubricant.

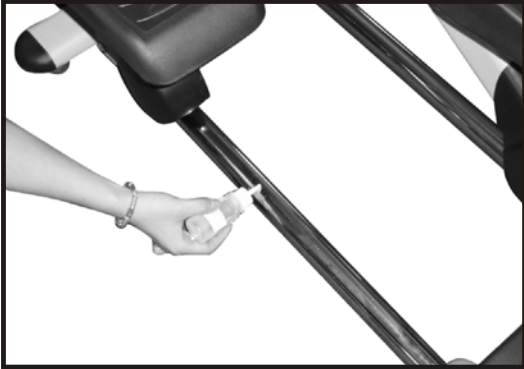

TRANSPORTATION

The elliptical is equipped with transport wheels, which are engaged when the rear of the elliptical is lifted.

REMOVE THIS BAR BEFORE ASSEMBLY



WARNING


This packaging support bar is attached to the unit to keep it safe during transport. Please remove it before assembly. Thank you.

ASSEMBLY INSTRUCTIONS


PRE-ASSEMBLY

1. Using a razor knife (Box Cutter), cut the banding straps that wrap around the carton. Reach under the bottom edge of the carton and pull it away from the cardboard underneath, separating the staples that join the two together. Lift the box over the unit and unpack.
2. Carefully remove all parts from carton and inspect for any damage or missing parts. If damaged parts are found, or parts are missing, contact your dealer immediately.
3. Locate the hardware package. The hardware is separated into four steps. Remove the tools first. Remove the hardware for each step as needed to avoid confusion. The numbers in the instructions that are in parenthesis (**#**) are the item number from the assembly drawing for reference.


ASSEMBLY TOOLS

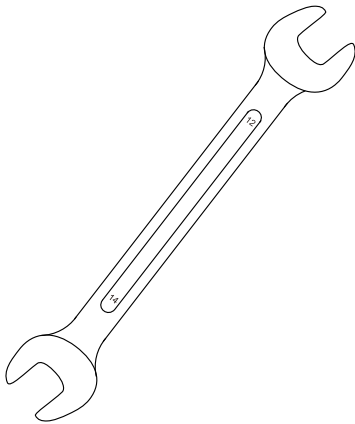


#195. 12/14mm Wrench (1 pc)

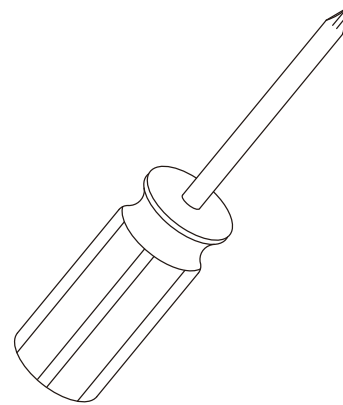


#192. Phillips Head Screwdriver (1 pc)

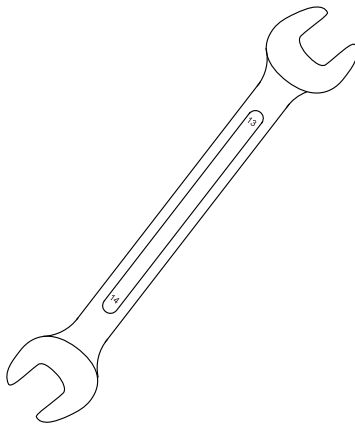

#194. 13/14mm Wrench (1 pc)

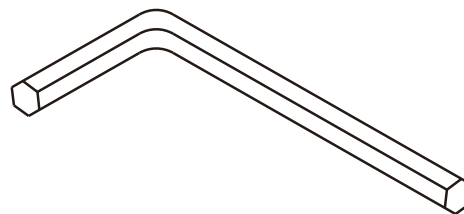


#193. M8 L Allen Wrench (1 pc)

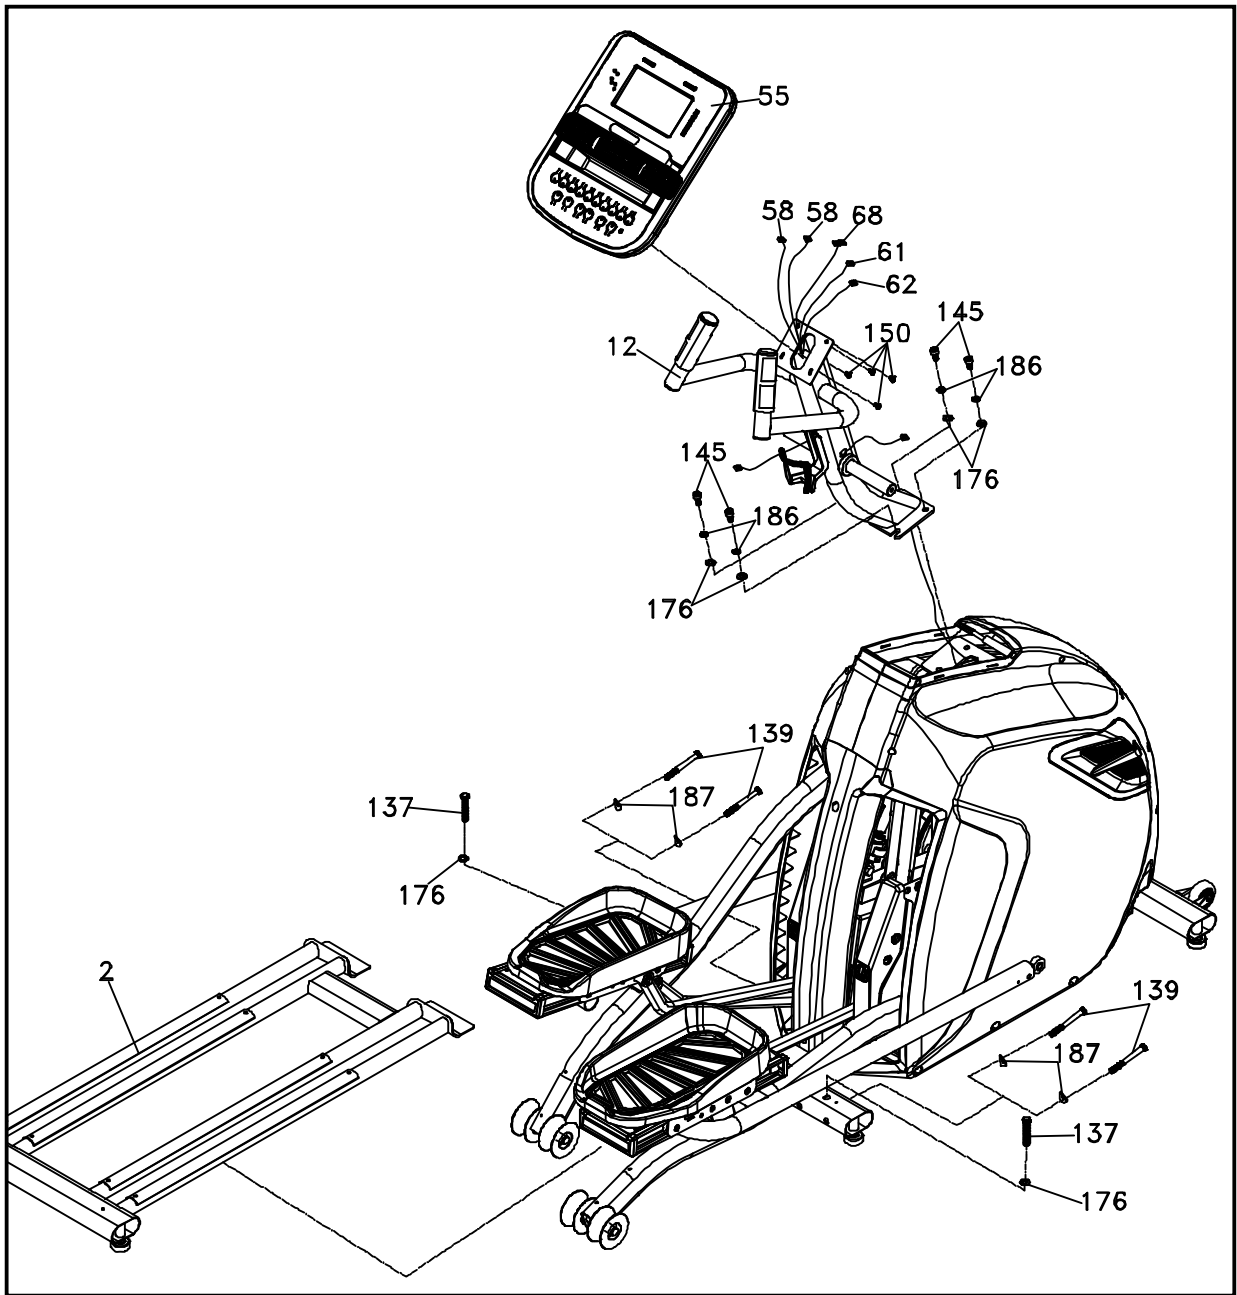


STEP 1

1. Gather **HARDWARE FOR STEP 1**.
2. Put the 2 **FLAT WASHERS (176)** on the 2 **HEX HEAD BOLTS (137)** and hand-tighten them, through the **TOP** of the **MIDDLE STABILIZER TUBE**, into the **REAR RAIL ASSEMBLY (2)** with the **WRENCH (194)**.
3. Put 4 **CURVED WASHERS (187)** on the 4 **HEX HEAD BOLTS (139)** and hand-tighten them through the **FRONT** of the **MIDDLE STABILIZER TUBE**, into the **REAR RAIL ASSEMBLY (2)** with the **WRENCH (194)**.
4. Use **WRENCH (193)** to release 2 **SOCKET HEAD CAP BOLTS** and take apart side back disposed. Feed the **COMPUTER CABLE (68)** from the bottom of the mast tube through it and pull out of the top. Use 4 **SOCKET HEAD CAP BOLTS (145)**, 4 **SPRING WASHERS (186)** and 4 **FLAT WASHERS (176)** to secure.
5. Untie the **COMPUTER CABLE (68)**, connect 2 **HANDPULSE W/CABLE ASSEMBLY (58)** and **HANDLE WIRE (Upper)**, **RESISTANCE/ INCLINE (White/Red) (61/62)** with the **CONSOLE ASSEMBLY (55)** respectively. Then place the **CONSOLE** on top of the **MAST** and use **PHILLIPS HEAD SCREW DRIVER (192)** to tighten 4 **PHILLIPS HEAD SCREWS (150)** to secure.


HARDWARE




#176. 3/8" x 19 x 1.5T
Flat Washer
(6 pcs)



#137. 3/8" x 2-1/4"
Hex Head Bolt
(2 pcs)



#187. 3/8" x 23 x 2T
Curved Washer
(4 pcs)




#139. 3/8" x 3-3/4"
Hex Head Bolt
(4 pcs)




#186. 10mm x 2T
Spring Washer
(4 pcs)



#150. M5 x 10m/m
Phillips Head Screw
(4pcs)




#145. 3/8"X3/4" Socket
Head Cap Bolt (4 pcs)

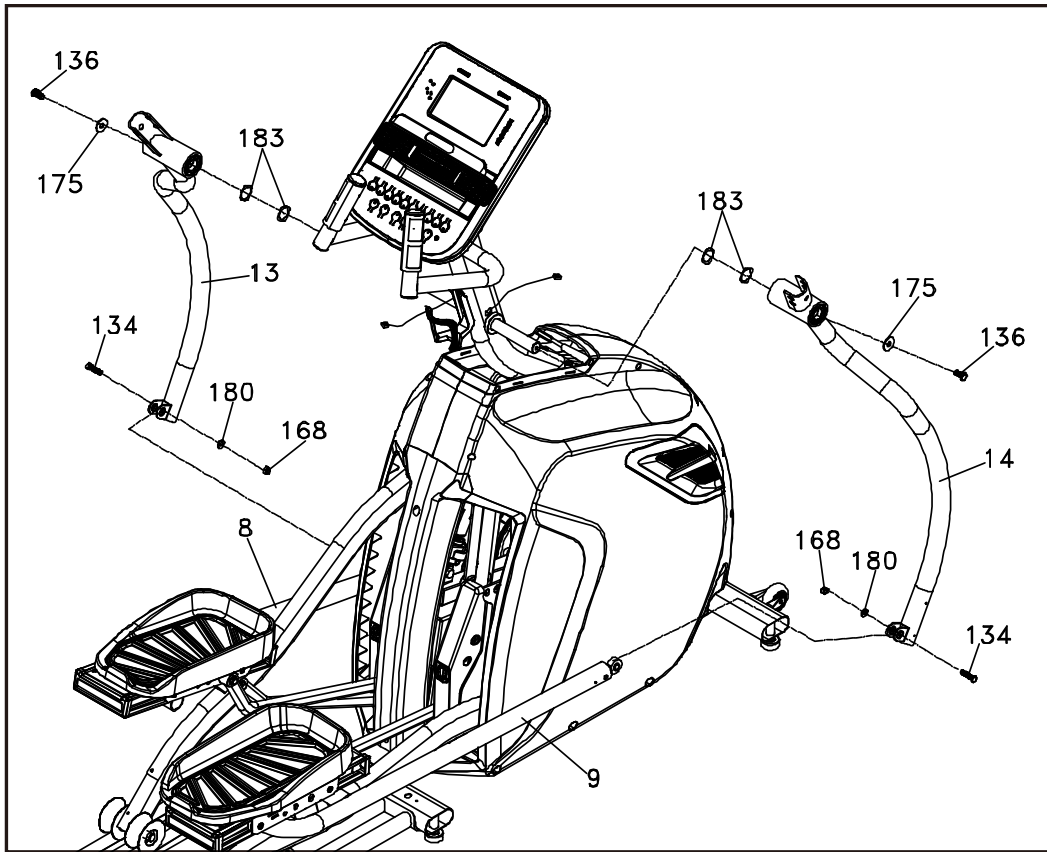


STEP 2

1. Gather **HARDWARE FOR STEP 2**.
2. Locate the **LEFT** and **RIGHT LOWER SWING ARMS (13, 14)** together with 4 **WAVE WASHERS (183)** onto **LEFT** and **RIGHT SHAFTS** of the **MAST TUBE** then tighten with 2 **HEX HEAD BOLTS (136)** and two **FLAT WASHERS (175)** by using the **WRENCH (194)**.
3. Untie the Rod End Bearing on the **LEFT CONNECTING ARM (8)** and feed the **HEX HEAD BOLT (134)** through the rod end holes and rod end bearing then tighten with **FLAT WASHER (180)** and **NYLOC NUT (168)** by using the **WRENCH (194)** and **WRENCH (195)**. Repeat this step for the **RIGHT CONNECTING ARM (9)** and **RIGHT LOWER SWING ARM (14)**.

HARDWARE



#175. 3/8" x 30 x 2.0T
Flat Washer
(2 pcs)



#180. 5/16" x 20 x 1.5T
Flat Washer
(2 pcs)




#168. 5/16" x9T
Nyloc Nut
(2 pcs)




#183. \varnothing 25 Wave Washer
(4 pcs)



#134. 5/16" x 1-1/4"
Hex Head Bolt
(2 pcs)




#136. 3/8" x 3/4"
Hex Head Bolt
(2 pcs)

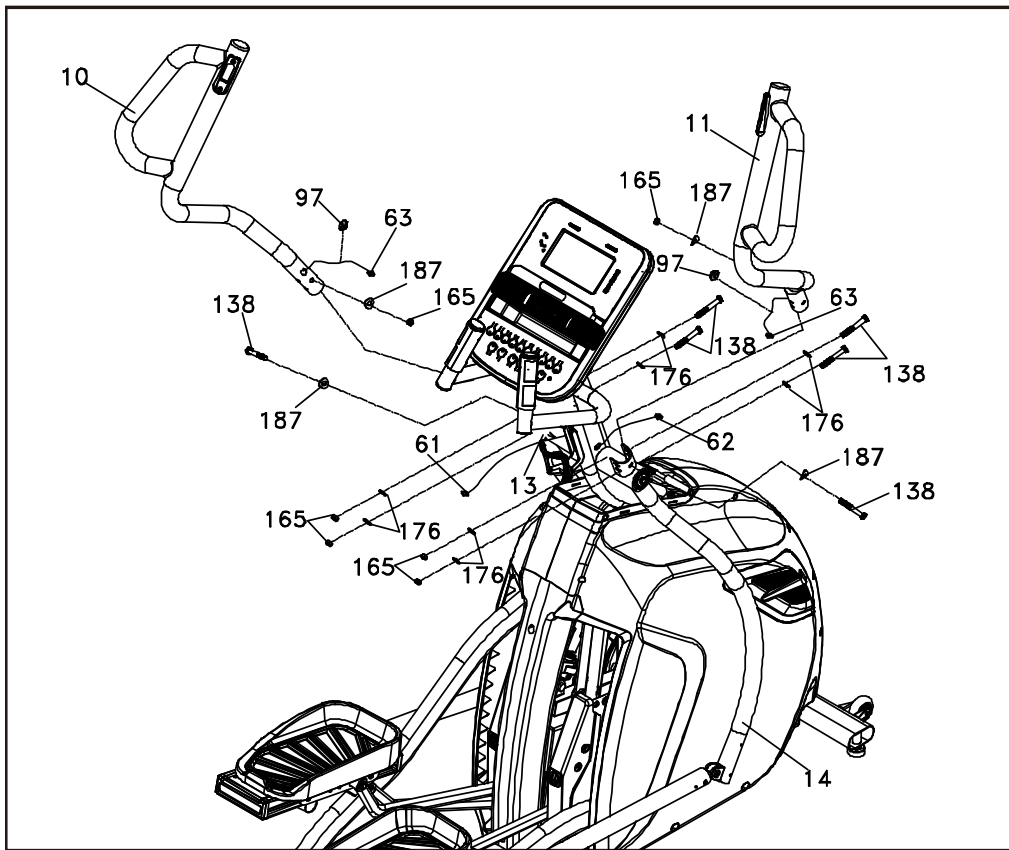


STEP 3

1. Gather **HARDWARE FOR STEP 3**.
2. Insert the **LEFT UPPER SWING ARM (10)** onto the **LEFT LOWER SWING ARM (13)** and secure with 3 **HEX HEAD BOLTS (138)**, 4 **FLAT WASHERS (176)**, 2 **CURVED WASHERS (187)** and 3 **NYLOC NUTS (165)** by using **WRENCH (194)** and **WRENCH (195)**. Repeat this step for the **RIGHT UPPER SWING ARM (11)** and the **RIGHT LOWER SWING ARM (14)**.
3. Connect the **HANDLE WIRE (UPPER), RESISTANCE (WHITE, 61)** and **HANDLE WIRE (UPPER), STRIDE (RED, 62)** to 2 **HANDLE WIRES (LOWER), RESISTANCE/STRIDE (63)** respectively and save the excessive wires in the mast tube. Finally, plug in the **SWITCH WIRE CAPS** onto the **MAST TUBE** to secure the wire.

HARDWARE

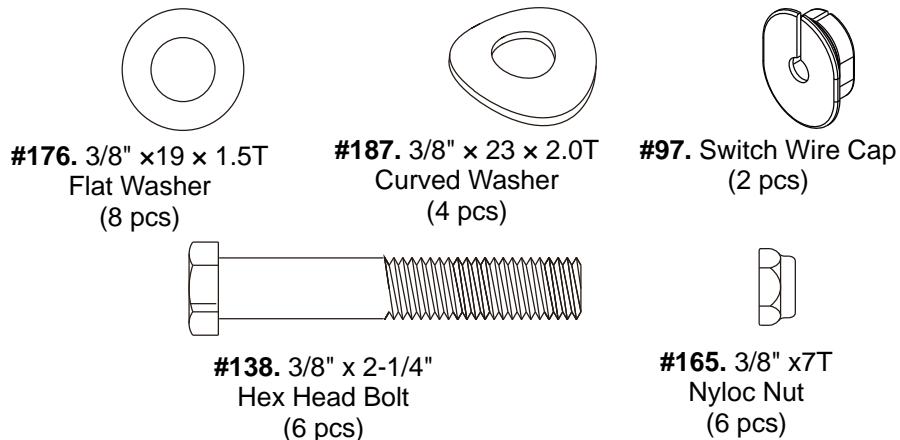


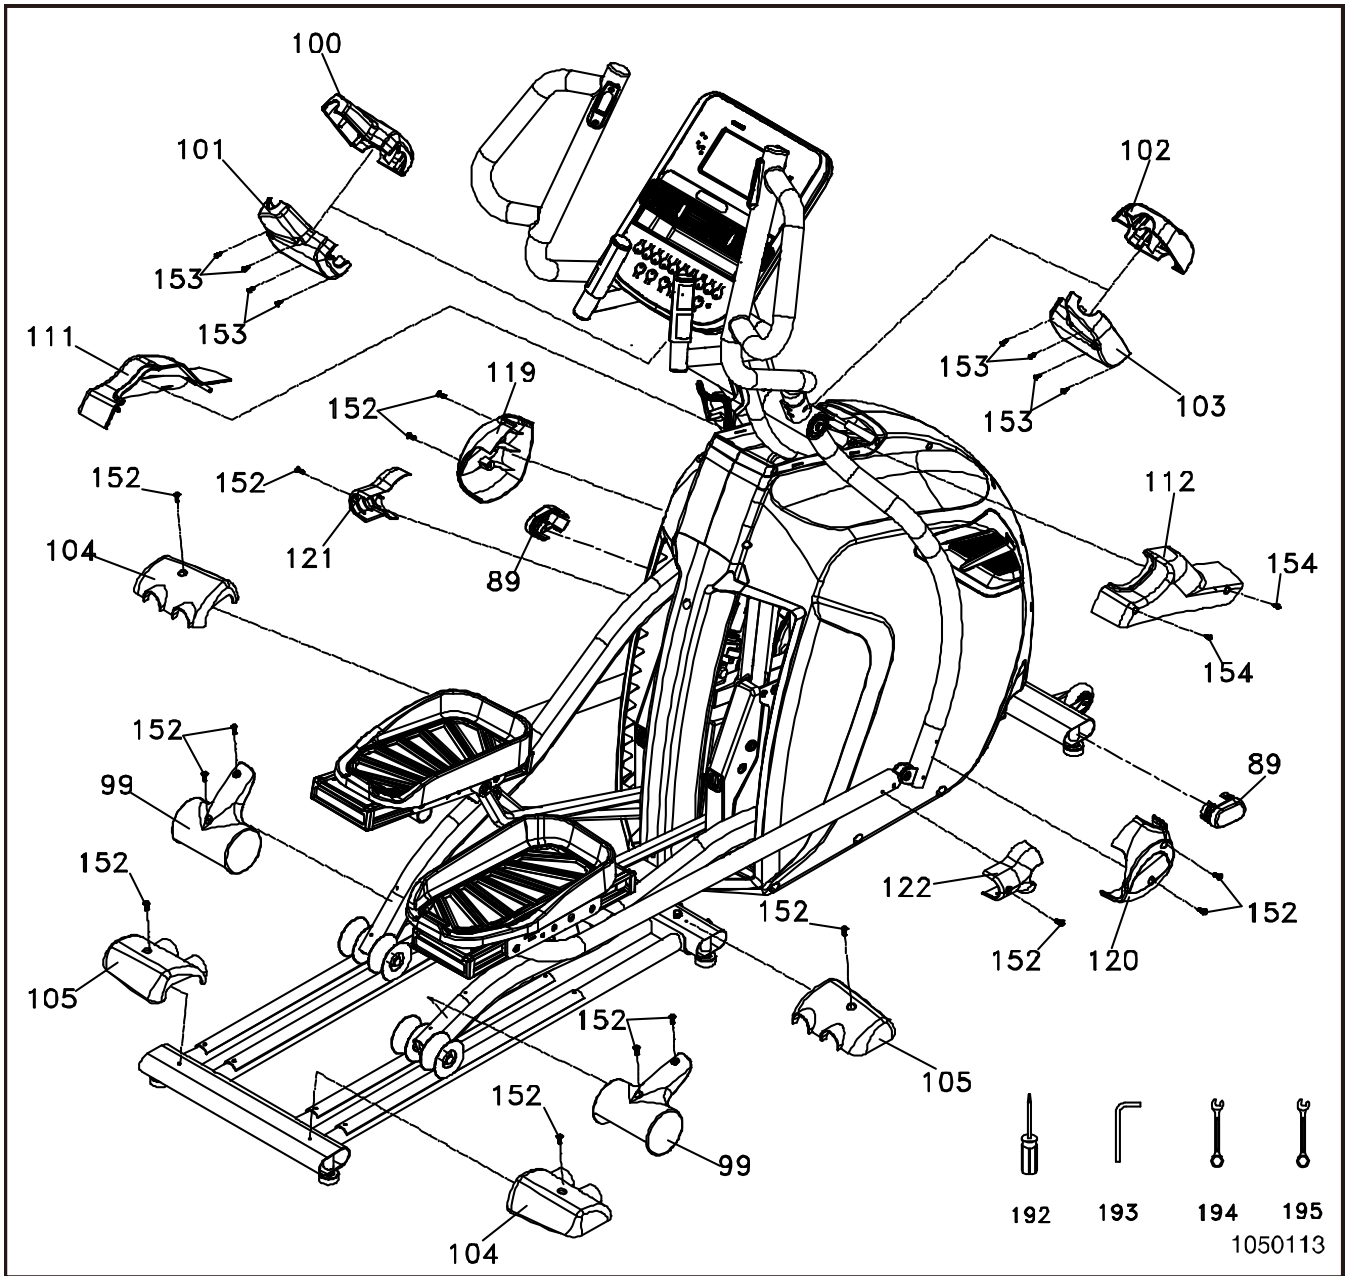

STEP 4

1. Gather **HARDWARE FOR STEP 4**.
2. Secure the **LEFT CONNECTING ARM COVER B (121)** on the left Connecting Arm with the **PHILLIPS HEAD SCREW (152)** by using the **PHILLIPS HEAD SCREW DRIVER (192)** then secure the **LEFT CONNECTING ARM COVER A (119)** with 2 **PHILLIPS HEAD SCREWS (152)** on the Lower Handle Bar. Repeat this step for the **RIGHT CONNECTING ARM COVER B (122)** and **RIGHT CONNECTING ARM COVER A (120)** on the right Connecting Arm and right Lower Handlebar, respectively.
3. Secure 2 **SLIDE WHEEL COVERS (99)** on both **LEFT** and **RIGHT PEDAL ARMS** with 4 **PHILLIPS HEAD SCREWS (152)** by using the **PHILLIPS HEAD SCREW DRIVER (192)**.
4. Use the **PHILLIPS HEAD SCREW DRIVER (192)** with 4 **PHILLIPS HEAD SCREWS (152)** and secure 2 **REAR STABILIZER COVERS (A) (104)** and 2 **REAR STABILIZER COVER (B) (105)** on both left and right sides of rear tube of rear rail assembly.
5. Match the **LEFT** and **RIGHT CONSOLE MAST COVERS (111, 112)** with **LEFT** and **RIGHT** side cases respectively and secure with 2 **SHEET METAL SCREWS (154)** by using the **PHILLIPS HEAD SCREW DRIVER (192)**.
6. Match the **FRONT HANDLE BAR COVER (100)** and the **REAR HANDLE BAR COVER (101)** with each other on the **LEFT LOWER HANDLE BAR** and use the **PHILLIPS HEAD SCREW DRIVER** to tighten 4 **SHEET METAL SCREWS (153)**. Do the same for the **RIGHT FRONT HANDLE BAR COVERS (102)** and the **REAR HANDLE BAR COVER (103)**. (Be aware not to pinch the wire)
7. Plug in both **OVAL END CAPS (89)** onto both ends of the **FRONT STABILIZER TUBE**.

HARDWARE



#152. M5 x15m/m
Button Head Socket Bolt
(14 pcs)




#153. 3.5 x12m/m
Sheet Metal Screw
(8 pcs)



#154. 4 x15m/m
Sheet Metal Screw
(2 pcs)

OPERATION OF YOUR ELLIPTICAL

GETTING FAMILIAR WITH THE CONTROL PANEL

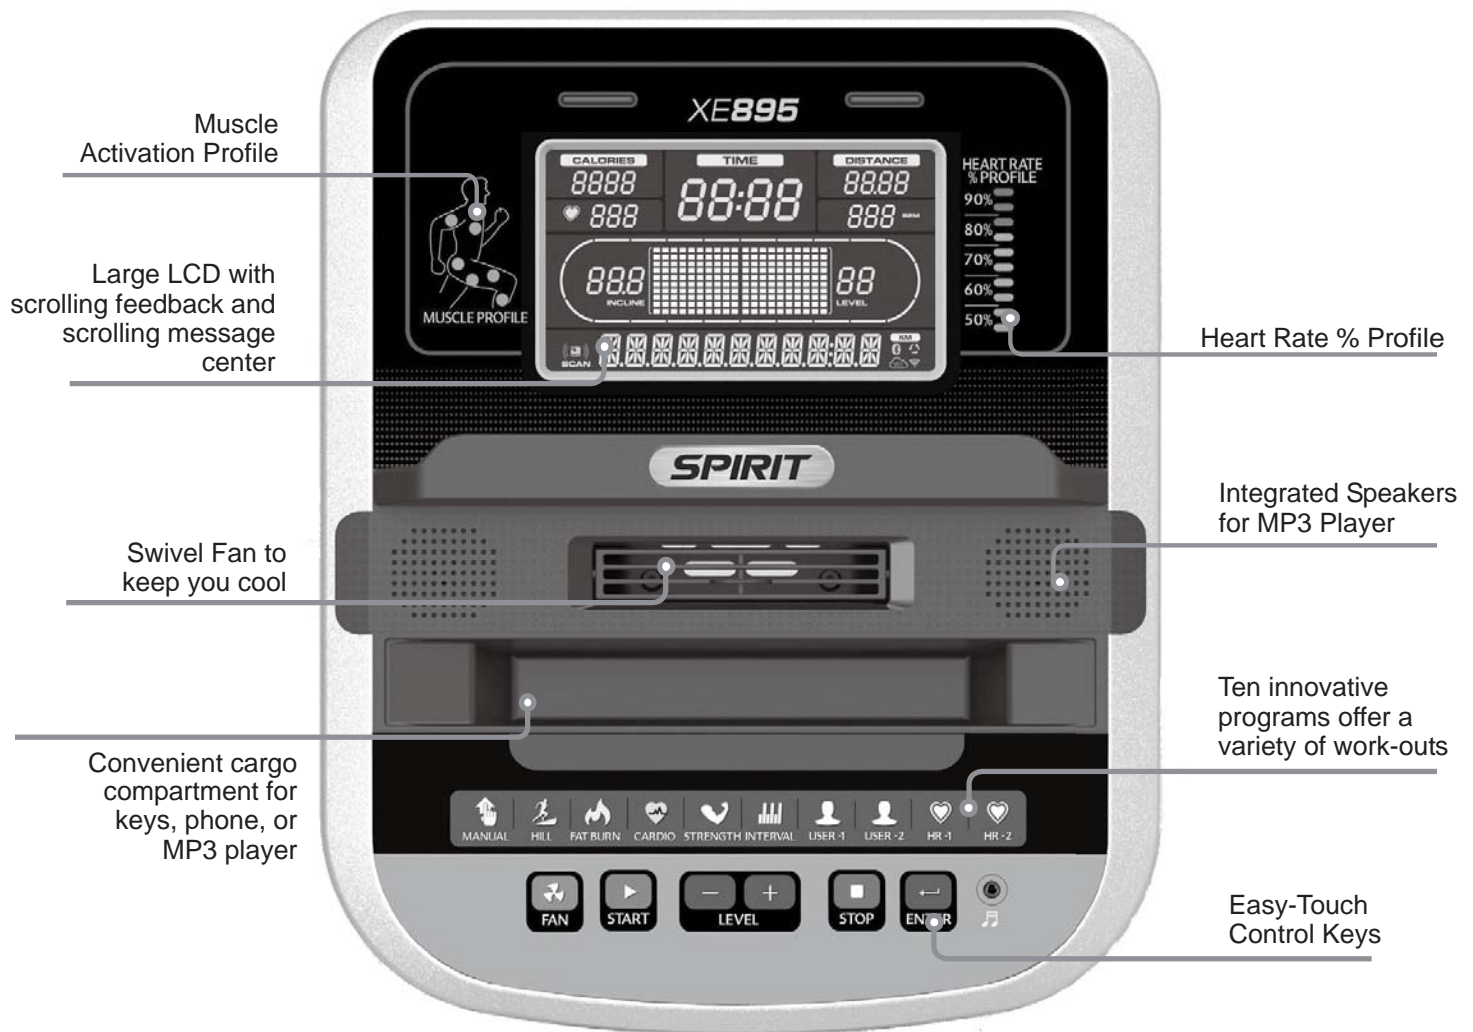

POWER

When the power cord is connected to the elliptical, the console will automatically power up. When initially powered on the console will perform an internal self-test. During this time all the lights will turn on. When the lights go off, the Message Center will show the software version (i.e.: VER 1.0). The distance window shows the distance total and the time window shows the total hours of use.

The odometer will remain displayed for only a few seconds then the console will go to the start up display. The dot matrix display will be scrolling through the different profiles of the programs and the Message Center will be scrolling the start up message. You may now begin to use the console.

Dot Matrix Center Display

Twenty columns of boxes (10 high) indicate each segment of a workout. The boxes only show an approximate level (resistance) of effort. They do not necessarily indicate a specific value - only an approximate percent to compare levels of intensity. In Manual Operation the resistance dot matrix window will build a profile "picture" as values are changed during a workout.

The Lap track will move in a counterclockwise direction.

1/4 Mile / 0.4k Track

The 1/4-mile track (one lap) will be displayed around the dot matrix window. The flashing segment indicates your progress. Once the 1/4-mile (Metric - 0.4k) is complete this feature will begin again. There is a lap counter in the message window for monitoring your distance.

Pulse Grip Feature

The Pulse (Heart Rate) window will display your current heart rate in beats per minute during the workout. You must use both stainless steel sensors on the stationary grips or the heart rate transmitter chest strap to display your pulse. Pulse value displays anytime on the upper display when receiving a Pulse signal. You may not use the Grip Pulse feature while in Heart Rate Programs.

Calorie Display

Displays the cumulative calories burned at any given time during your workout.

Note: This is only a rough guide used for comparison of different exercise sessions, which cannot be used for medical purposes.

Speakers

The console has built-in Speakers and an audio input jack. There is no volume control on the console.

The volume must be controlled on the Audio Source.

Remote Level and Stride Control

Remote handlebar toggles for both resistance and stride allow for secure workout changes without taking your hands off the handlebars.

Muscle Activation Figure

There is an anatomical figure located at the left of the console. This figure will light all areas that are activated when using the elliptical trainer. These will light up during any of the programs. You can control which muscles are activated by customizing the resistance profile during the set up phase of console programming. If you accept the default program profile, the selected program will determine which muscles will be activated by automatically adjusting the resistance. Generally the following guidelines hold true:

- The upper body lights will activate when you are either holding onto the swing arms or at anytime your hands aren't holding onto the pulse grip sensors.
- The lower body lights will activate in three degrees of engagement: Green represents minimal muscle involvement, Amber represents medium involvement, and Red represents full or heavy activation.
- These are the different scenarios for lower body muscle activation
 - Forward pedal rotation
Gluteals & Quadriceps are Amber; Hamstrings & Calves are Green
 - Reverse pedal rotation
Calves, Hamstrings, and Quadriceps are Amber; Gluteals are Green

Heart Rate % Profile

The console LCD screen will display your current heart rate anytime a pulse is detected. The Bar Graph, located to the right of the LCD screen, will show your current heart rate % in relation to your projected maximum heart rate, which is determined by your age that you entered during the programming phase of any of the 10 programs. The significance of the bar graph colors are as follows:

- 50-60% of maximum is Amber
- 65-80% of maximum is Amber and Green
- 85-90% or more is Amber, Green, and Red

Quick Start

This is the quickest way to start a workout. After the console powers up you just press the **Start** key to begin, this will initiate the Quick Start mode. In Quick Start the Time will count up from zero and the workload may be adjusted manually by pressing the **Level Up/Down** keys. The dot matrix display will have only the bottom row lit at first. As you increase the work load more rows will light indicating a harder workout. The elliptical trainer will get harder to pedal as the rows increase.

There are 20 levels of resistance available for plenty of variety. The first 5 levels are very easy workloads and the changes between levels are set to a good progression for de-conditioned users. Levels 6-10 are more challenging, but the increases in resistance from one level to the next remain small. Levels 11-15 start getting tough as the levels jump more dramatically. Levels 16-20 are extremely hard and are good for short interval peaks and elite athletic training.

Basic Information

The Message Center will initially be displaying the Program name. When in scan mode during a program, speed will be displayed for four seconds, then move on and display Watts (indication of workload). If 100 watts is displayed, you are doing enough work to keep a 100-watt light bulb lit. The data changes to Laps completed, Segment time, Max level. Pressing the **Enter** key again will bring you back to the beginning.

The **Stop** key actually has several functions. Pressing the **Stop** key once during a program will pause the program for 5 minutes. If you need to get a drink, answer the phone or any of the many things that could interrupt your workout, this is a great feature. To resume your workout during Pause, just press the **Start** key. If the **Stop** key is pressed twice during a workout, the program will end and the console will display your Workout Summary (Total time, Avg. Speed, Avg. Watts, Avg. HR, total Laps). If the **Stop** key is held down for 3 seconds or a third time during the program, the console will perform a complete **Reset**. During data entry for a program the **Stop** key performs a previous screen or segment function. This allows you to go back to change programming data.

Program Keys

The program keys are used to preview each program. When you first turn the console on you may press each program key to preview what the program profile looks like. If you decide that you want to try a program, press the corresponding program key and then press the **Enter** key to select the program and enter into the data-setting mode.

The elliptical trainer has a built in heart rate monitoring system. Simply grasping the hand pulse sensors on the stationary handle bars or wearing the heart rate transmitter (see Using Heart Rate Transmitter section) will start the Heart Icon blinking (this may take a few seconds). The Pulse Display Window will display your heart rate, or Pulse in beats per minute.

The console includes a built-in fan to help keep you cool. To turn the fan on, press the key on the left side of the console.

Programming The Console

Each of the programs can be customized with your personal information and changed to suit your needs. Some of the information is necessary to ensure the readouts are correct. You will be asked for your Age and Weight. Entering your Age is necessary during the Heart Rate programs to ensure the correct predicted target heart rate zone. Entering your Weight aides in calculating a more correct Calorie reading. Although we cannot provide an exact calorie count, we do want to be as close as possible.

CALORIE NOTE: Calorie readings on every piece of exercise equipment, whether it is in a gym or at home, are only an estimate and tend to vary widely. They are meant only as a guide to monitor your progress from workout to workout.

Entering A Program And Changing Settings

When you enter a program, by pressing a program key, then **Enter** key, you have the option of entering your own personal settings. If you want to workout without entering new settings, then just press the **Start** key. This will bypass the programming of data and take you directly to the start of your workout. If you want to change the personal settings then just follow the instructions in the Message Center. If you start a program without changing the settings, the default or saved settings will be used.

NOTE: Age and Weight default settings will change when you enter a new number. So the last Age and Weight entered will be saved as the new default settings. If you enter your Age and Weight the first time you use the elliptical, you will not have to enter it every time you work out unless either your Age or Weight changes or someone else enters a different Age and Weight.

PROGRAMMABLE FEATURES

MANUAL

The Manual program works as the name implies, manually. This means that you control the workload and not the computer. To start the Manual program, follow the instructions below or just press the **Start** key.

1. Press the **Manual** key, then press the **Enter** key.
2. The Message Center will ask you to enter your Age. You may enter your age, using the **Level Up/Down** keys, then press the **Enter** key to accept the new value and proceed on to the next screen.
3. You are now asked to enter your Weight. You may adjust the Weight value using the **Level Up/Down** keys, then press **Enter** to continue.
4. Next is Time. You may adjust the Time and press **Enter** to continue.
5. Now you are finished editing the settings and can begin your workout by pressing the **Start** key. You can also go back and modify your settings by pressing the **Enter** key.
6. Once the program starts you will be at level one. This is the easiest level and it is a good idea to stay at level one for a while to warm up. If you want to increase the work load at any time press the **Level Up** key; the **Level Down** key will decrease the work-load.
7. During the Manual program you will be able to scroll through the data in the Message Center by pressing the **Enter** key.
8. When the program ends you may press **Start** to begin the same program again or **Stop** to exit the program or you can save the program you just completed as a custom user program by pressing a **User** key and following the instructions in the Message Center.

PRPROGRAMMING PRESET PROGRAMS

1. Select the desired program button then press the **Enter** key.
2. The Message Center will ask you to enter your Age. You may adjust the age setting, using the **Level Up/Down** keys, then press the **Enter** key to accept the new number and proceed on to the next screen.
3. You are now asked to enter your Weight. You may adjust the Weight value using the **Level Up/Down** keys, then press **Enter** to continue.
4. Next is Time. You may adjust the time and press **Enter** to continue.
5. Now you are asked to adjust the Max Resistance Level. This is the peak exertion level you will experience during the program. Adjust the level and then press **Enter**.
6. Now you are finished editing the settings and can begin your workout by pressing the **Start** key. You can also go back and modify your settings by pressing the **Enter** key.
7. If you want to increase or decrease the resistance at any time during the program, press the **Level Up/Down** keys on the console or above the heart rate sensor grips of the stationary handlebars. This will change the resistance settings of the entire profile, although the profile picture on the screen will not change. The reason for this is so that you can see the entire profile at all times. If the profile picture is changed, it also would be distorted and not a true representation of the actual profile. When you make a change to the resistance, the Message Center will show the current column and program maximum levels of work.
8. During the program you will be able to scroll through the data in the message window by pressing the **Enter** key.
9. When the program ends the Message Center will show a summary of your workout. The summary will be displayed for a short time, then the console will return to the start-up display.

CUSTOM USER DEFINED PROGRAMS


There are two customizable User programs that allow you to build and save your own workout. The two programs, **User 1** and **User 2**, operate exactly the same way so there is no reason to describe them separately. You can build your own custom program by following the instructions below or you can save any other preset program you complete as a custom program. Both programs allow you to further personalize it by adding your name.

1. Press the **User 1** or **User 2** key. The Message Center will show a welcome message. If you had previously saved a program the message will contain your name. Then press the **Enter** key to begin programming.
2. If you have already saved a program to either **U1** or **U2**, it will be displayed and you are ready to begin. If not, you will have the option of inputting a username. In the **Message Window**, the letter "A" will be blinking. Use the **Level Up/ Down buttons** to select the appropriate first letter of your name (pressing the up button will switch to the letter "B"; pressing the Down button will switch to letter "Z"). Press **Enter** when the desired letter is displayed. Repeat this process until all of the characters of your name have been programmed (maximum 7 characters). When finished press **Stop**.
3. If there is a program already stored in **User** when you press the key, you will have an option to run the program as it is or delete the program and build a new one. At the welcome message screen, when pressing **Start** or **Enter** you will be prompted: Run Program? Use the **Level Up/Down arrows** to select Yes or No. If you select No, you will then be asked if you want to delete the currently saved program. It is necessary to delete the current program if you want to build a new one.
4. The Message Center will ask you to enter your Age. You may enter your age, using the **Level Up/Down keys**, then press the **Enter** key to accept the new value and proceed on to the next screen.
5. You are now asked to enter your Weight. You may adjust the weight value using the **Level Up/Down keys** or the numeric key pad, then press **Enter** to continue.
6. Next is Time. You may adjust the time and press **Enter** to continue.
7. Now you are asked to adjust the Max Resistance Level of the program, press **Enter** when resistance has been selected.
8. Now the first column will be blinking and you are asked to adjust the resistance level for the first segment (SEGMENT 1) of the workout by using the **Level Up key**. When you finish adjusting the first segment, or if you don't want to change, then press **Enter** to continue to the next segment.
9. The next segment will show the same workload resistance level as the previously adjusted segment. Repeat the same process as the last segment then press **Enter**. Continue this process until all twenty segments have been set.
10. Now you are asked to adjust the stride Level the first column will be blinking and you are asked to adjust the stride level for the first segment (SEGMENT > 1) of the workout by using the **Level Up/Down keys**. When you finish adjusting the first segment, or if you don't want to change, then press **Enter** to continue to the next segment.
11. The next segment will show the same workload stride level as the previously adjusted segment. Repeat the same process as the last segment then press **Enter**. Continue this process until all twenty segments have been set.
12. The Message Center will then tell you to press Enter to save the program. After saving the program the Message Center says "PROG SAVED" then will give you the option to Start or modify the program. Pressing **Stop** will exit to the start up screen.


PRESET PROGRAMS

The elliptical has five different programs that have been designed for a variety of workouts. These five programs have factory preset work level profiles for achieving different goals.


Hill
 Resistance: This program follows a triangle or pyramid type of gradual progression from approximately 10% of maximum effort (the level that you chose before starting this program) up to a maximum effort which lasts for 10% of the total workout time, then a gradual regression of resistance back to approximately 10% of maximum effort.

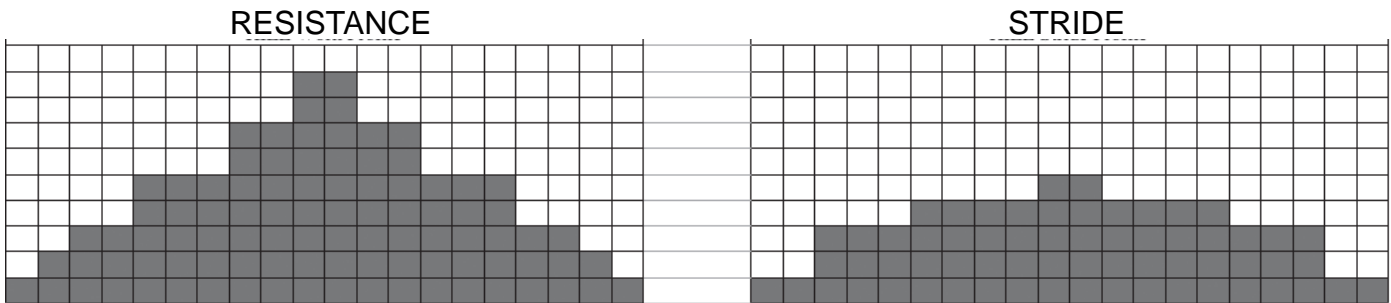

Fat Burn
 Resistance: This program follows a quick progression up to the maximum resistance level (default or user input level) that is sustained for 2/3 of the workout. This program will challenge your ability to sustain your energy output for an extended period of time.

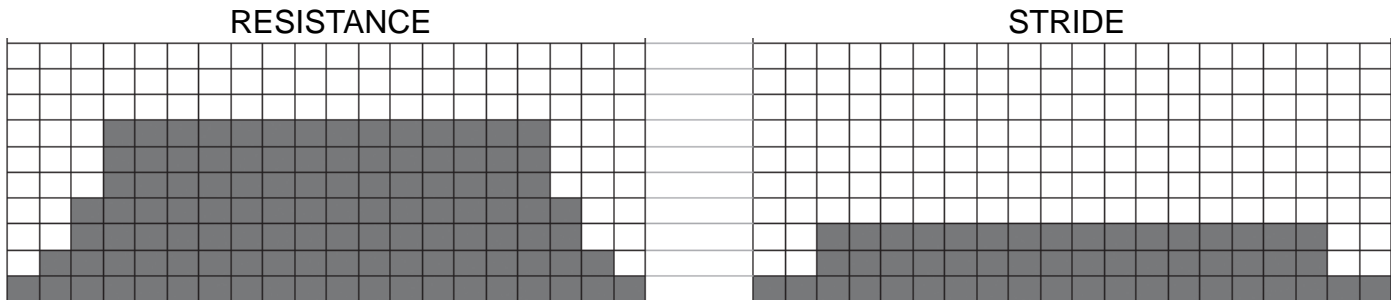


Cardio
 Resistance: This program presents a quick progression up to near maximum resistance level (default or user input level). It has slight fluctuations up and down to allow your heart rate to elevate, and then recover repeatedly, before beginning a quick cool down. This will build up your heart muscle and increase blood flow and lung capacity.

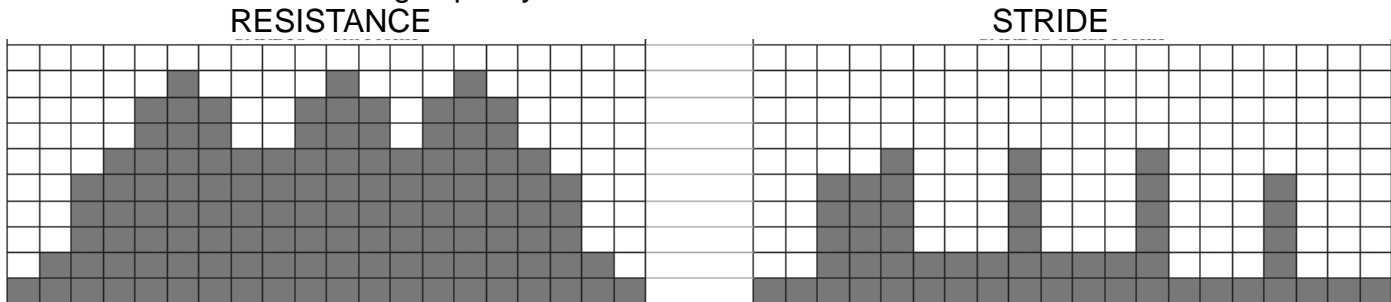


Strength

Resistance: This program has a gradual progression of resistance up to 100% of maximum effort that is sustained for 25% of workout duration. This will help build strength and muscular endurance in the lower body and gluts. A brief cool down follows.

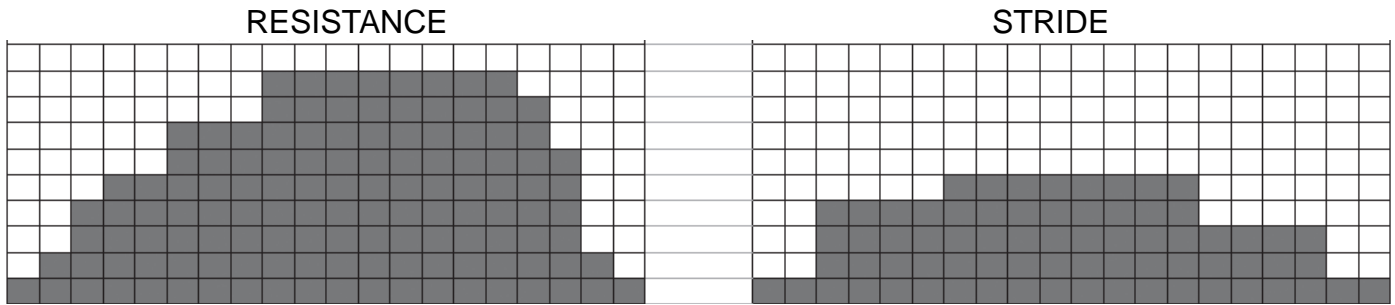

Interval

Resistance: This program takes you through high levels of intensity followed by recovery periods of low intensity. This program utilizes and develops your “Fast Twitch” muscle fibers which are used when performing tasks that are intense and short in duration. These deplete your oxygen level and spike your heart rate, followed by periods of recovery and heart rate drop to replenish oxygen. Your cardiovascular system gets programmed to use oxygen more efficiently.

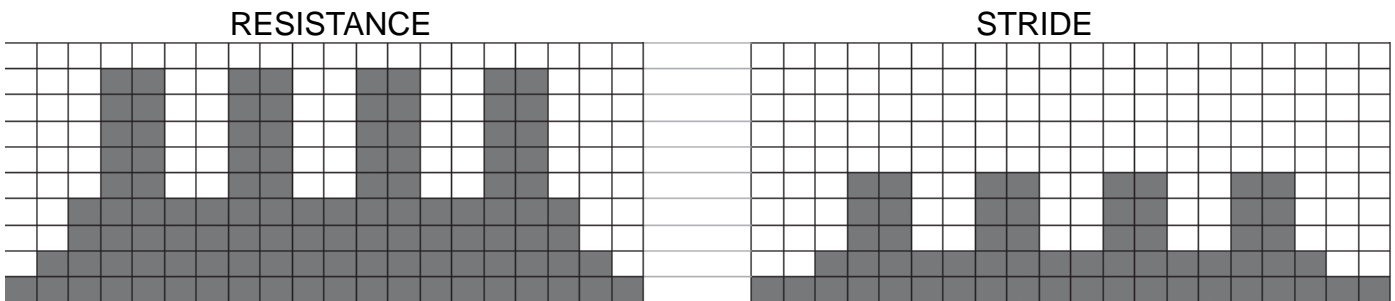

HEART RATE PROGRAMS

Before we get started, a word about Heart Rate:

The old motto, “no pain, no gain”, is a myth that has been overpowered by the benefits of exercising comfortably. A great deal of this success has been promoted by the use of heart rate monitors. With the proper use of a heart rate monitor, many people find that their usual choice of exercise intensity was either too high or too low and exercise is much more enjoyable by maintaining their heart rate in the desired benefit range.


To determine the benefit range in which you wish to train, you must first determine your Maximum Heart Rate. This can be accomplished by using the following formula: 220 minus your age. This will give you the Maximum heart rate (MHR) for someone of your age. To determine the effective heart rate range for specific goals you simply calculate a percentage your MHR. Your Heart rate training zone is 50% to 90% of your maximum heart rate. 60% of your MHR is the zone that burns fat while 80% is for strengthening the cardio vascular system. This 60% to 80% is the zone to stay in for maximum benefit.

For someone who is 40 years old their target heart rate zone is calculated:

$220 - 40 = 180$ (maximum heart rate)
 $180 \times .6 = 108$ beats per minute (60% of maximum)
 $180 \times .8 = 144$ beats per minute (80% of maximum)

So for a 40 year old the training zone would be 108 to 144 beats per minute.

If you enter your age during programming the console will perform this calculation automatically. Entering your age is used for the Heart Rate control programs. After calculating your Maximum Heart Rate you can decide upon which goal you would like to pursue.

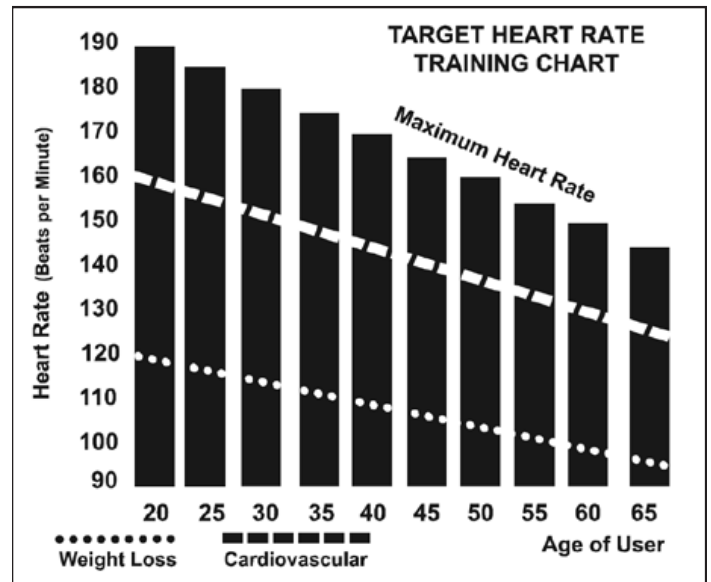

The two most popular reasons for, or goals, of exercise are cardiovascular fitness (training for the heart and lungs) and weight control. The black columns on the chart above represent the Maximum Heart Rate for a person whose age is listed at the bottom of each column. The training heart rate, for either cardiovascular fitness or weight loss, is represented by two different lines that cut diagonally through the chart. A definition of the lines' goal is in the bottom left-hand corner of the chart. If your goal is cardiovascular fitness or if it is weight loss, it can be achieved by training at 80% or 60%, respectively, of your Maximum Heart Rate on a schedule approved by your physician. Consult your physician before participating in any exercise program.

RATE OF PERCEIVED EXERTION

Heart rate is important but listening to your body also has a lot of advantages. There are more variables involved in how hard you should workout than just heart rate. Your stress level, physical health, emotional health, temperature, humidity, the time of day, the last time you ate and what you ate, all contribute to the intensity at which you should workout. If you listen to your body, it will tell you all of these things.

The rate of perceived exertion (RPE), also know as the Borg scale, was developed by Swedish physiologist G.A.V. Borg. This scale rates exercise intensity from 6 to 20 depending upon how you feel or the perception of your effort.

The scale is as follows:

Rating Perception of Effort

6 Minimal

7 Very, very light

8 Very, very light +

9 Very light

10 Very light +

11 Fairly light

12 Comfortable

13 Somewhat hard

14 Somewhat hard +

15 Hard

16 Hard +

17 Very hard

18 Very hard +

19 Very, very hard

20 Maximal

You can get an approximate heart rate level for each rating by simply adding a zero to each rating. For example a rating of 12 will result in an approximate heart rate of 120 beats per minute. Your RPE will vary depending up the factors discussed earlier. That is the major benefit of this type of training. If your body is strong and rested, you will feel strong and your pace will feel easier. When your body is in this condition, you are able to train harder and the RPE will support this. If you are feeling tired and sluggish, it is because your body needs a break. In this condition, your pace will feel harder. Again, this will show up in your RPE and you will train at the proper level for that day.

USING HEART RATE TRANSMITTER (Optional)

How to wear your wireless chest strap transmitter:

1. Attach the transmitter to the elastic strap using the locking parts.
2. Adjust the strap as tightly as possible as long as the strap is not too tight to remain comfortable.
3. Position the transmitter with the logo centered in the middle of your body facing away from your chest (some people must position the transmitter slightly left of center). Attach the final end of the elastic strap by inserting the round end and, using the locking parts, secure the transmitter and strap around your chest.
4. Position the transmitter immediately below the pectoral muscles.
5. Sweat is the best conductor to measure very minute heart beat electrical signals. However, plain water can also be used to pre-wet the electrodes (2 ribbed oval areas on the reverse side of the belt and both sides of the transmitter). It's also recommended that you wear the transmitter strap a few minutes before your work out. Some users, because of body chemistry, have a more difficult time in achieving a strong, steady signal at the beginning. After "warming up", this problem lessens. As noted, wearing clothing over the transmitter/strap doesn't affect performance.
6. Your workout must be within range - distance between transmitter/receiver – to achieve a strong steady signal. The length of range may vary somewhat but generally stay close enough to the console to maintain good, strong, reliable readings. Wearing the transmitter immediately against bare skin assures you of proper operation. If you wish, you may wear the transmitter over a shirt. To do so, moisten the areas of the shirt that the electrodes will rest upon.



Note: The transmitter is automatically activated when it detects activity from the user's heart. Additionally, it automatically deactivates when it does not receive any activity. Although the transmitter is water resistant, moisture can have the effect of creating false signals, so you should take precautions to completely dry the transmitter after use to prolong battery life (estimated transmitter battery life is 2500 hours). The replacement battery is Panasonic CR2032.

ERRATIC OPERATION

Caution! Do not use this elliptical for Heart Rate Control unless a steady, solid Actual Heart Rate value is being displayed. High, wild, random numbers being displayed indicate a problem.

Areas to look for interference which may cause erratic heart rate:

1. Microwave ovens, TV's, small appliances, etc.
2. Fluorescent lights.
3. Some household security systems.
4. Perimeter fence for a pet.
5. Some people have problems with the transmitter picking up a signal from their skin. If you have problems try wearing the transmitter upside down. Normally the transmitter will be oriented so the logo is right side up.
6. The antenna that picks up your heart rate is very sensitive. If there is an outside noise source, turning the whole machine 90 degrees may de-tune the interference.
7. Another Individual wearing a transmitter within 3' of your machine's console.

If you continue to experience problems contact your dealer.

HEART RATE PROGRAM OPERATION

Note: You must wear the heart rate transmitter strap for these programs.

Both programs operate the same, the only difference is that **HR1** is set to 60% and **HR2** is set to 80% of the maximum heart rate. They both are programmed the same way.

To start an HRC program follow the instructions below or just select the HR1 or HR2 program, then the Enter button and follow the directions in the Message Center.

After selecting your heart rate target the program will attempt to keep you at or within 3-5 heart beats per minute of this value. Follow the prompts in the Message Center to maintain your selected heart rate value.

1. Press the **HR 1** or **HR 2** key then press the **Enter** key.
2. The Message Center will ask you to enter your Age. You may enter your age, using the **Level Up/Down keys**, then press the **Enter** key to accept the new value and proceed on to the next screen.
3. You are now asked to enter your Weight. You may adjust the weight value using the **Level Up/Down keys**, then press **Enter** to continue.
4. Next is Time. You may adjust the time and press **Enter** to continue.
5. Now you are asked to adjust the Heart Rate Target. This is the heart rate level you will strive to maintain during the program. Adjust the level using the **Level Up/Down keys**, then press **Enter**.
Note: The heart rate that appears is based on the % you accepted in Step 1. If you change this number it will either increase or decrease the % from Step 1.
6. Now you are finished editing the settings and can begin your workout by pressing the **Start** key. You can also go back and modify your settings by pressing the **Enter** key.
7. If you want to increase or decrease the workload at any time during the program press the **Level Up/Down key**. This will allow you to change your target heart rate at any time during the program.
8. During the HR 1 or HR 2 programs you will be able to scroll through the data in the Message Center by pressing the **Enter** key.
9. When the program ends you may press **Start** to begin the same program again or **Stop** to exit the program.

USING THE SPIRIT FIT APP


In order to help you achieve your exercise goals, your new exercise machine comes equipped with a Bluetooth® transceiver that will allow it to interact with selected phones or tablet computers via the Spirit Fit App.

Just download the free Spirit Fit App from the Apple Store or Google Play, and then follow the instructions in the App to sync with your exercise machine. Now you can view current workout data in three different Display screens on your device. You can also easily switch back and forth from the workout display view to internet/social media/email sites via icons on the display screen. When your workout is finished, the data is automatically saved to the built-in personal calendar for future reference.

The Spirit Fit App also allows you to sync your workout data with one of many fitness cloud sites we support: iHealth, MapMyFitness, Record or Fitbit, with more to come.

Syncing the App with your exercise machine:

1. Download the App.
2. Open the App on your device (phone or tablet) and make sure Bluetooth® is enabled on your device (phone or tablet).
3. In the App click the icon in the top left corner to search for your Spirit equipment (shown right).

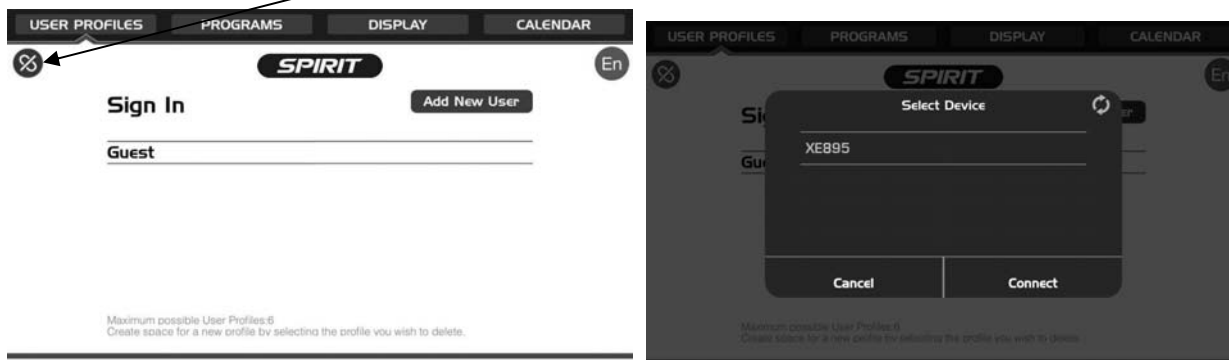

4. After the equipment is detected, click **Connect**. When the App and equipment are synced, the Bluetooth® icon on the equipment's console display will light up. You may now start using your new Spirit Fitness product.
5. When your workout is finished, the data is automatically saved and you will be prompted to sync your data with each available fitness cloud site. Please note you will have to download the applicable compatible fitness App, such as iHealth, MapMyFitness, Record, Fitbit, etc, in order for the icon to be active and available.

***Note: Your device will need to be running on a minimum operating system of iOS 7 or Android 4.4 for the Spirit Fit App to operate properly.**

PARTS LIST

KEY NO.	PART NO.	DESCRIPTION	Q'TY
1	6089501	Main Frame	1
2	6089502	Rear Rail Assembly	1
3	6089503	Idler Bracket	1
4	6089504	Crank Arm Assembly	2
5	6089505	Bushing Housing, Pedal Arm	2
6	6089506	Pedal Arm (L)	1
7	6089507	Pedal Arm (R)	1
8	6089508	Connecting Arm (L)	1
9	6089509	Connecting Arm (R)	1
10	6089510	Upper Swing Arm (L)	1
11	6089511	Upper Swing Arm (R)	1
12	6089512	Console Mast	1
13	6089513	Lower Swing Arm (L)	1
14	6089514	Lower Swing Arm (R)	1
15	6089515	Crank Axle	1
16	6089516	Swing Assembly	2
17	6089517	Slider Adjustment (L)	1
18	6089518	Slider Adjustment (R)	1
19	6089519	Console Holder Assembly	1
20	6089520	Joint Assembly	2
21	6089521	Adjusting Lever	2
22	6089522	Left Driving Assembly	1
23	6089523	Right Driving Assembly	1
24	6089524	Left Pedal Base	1
25	6089525	Right Pedal Base	1
26	6089526	Moving Range Adjusting Assembly	1
27	6089527	connecting Component	2
28	6089528	Side Back	1
29	6089529	Fixing Piece	2
30	6089530	Adjustment Wheel Fixing Plate(L)	2
31	6089531	Adjustment Wheel Fixing Plate(R)	2
32	6089532	Wheel Base	2
33	6089533	Control Fixing Plate	1
34	6089534	Incline Rotate Axle	1
35	6089535	Ø17 x 34L_Rotate Axle A	2
36	6089536	Ø17 x 41L_Rotate Axle B	2
37	6089537	Pedal Axle	2

KEY NO.	PART NO.	DESCRIPTION	Q'TY
38	6089538	Ø11.9 x Ø8.5 x 15m/m_Rod End Sleeve	10
39	6089539	Axle Stopper	1
40	6089540	Spring	2
41	6089541	32 x 11 x 2.5T x 625m/m_Aluminum Rail	4
42	6089542	Aluminum Track	4
43	6089543	6005_Bearing	6
44	6089544	6003_Bearing	8
45	6089545	608ZZ_Bearing	12
46	6089546	6203_Bearing	2
47	6089547	M12 x P1.75_Rod End Bearing	2
48	6089548	Drive Belt	1
49	6089549	Flywheel	1
50	6089550	Magnet	1
51	6089551	Steel Cable(250L)	1
52	6089552	Handgrip Resistance Label (STRIDE)	1
53	6089553	Handgrip Resistance Label (LEVEL)	1
54	6089554	Drink Bottle Holder	1
55	6089555	Console Assembly	1
55~1	6089555-1	Console Top Cover	1
55~2	6089555-2	Console Bottom Cover	1
55~3	6089555-3	Deflector Fan Grill	1
55~4	6089555-4	Wind Duct (L)	1
55~5	6089555-5	Wind Duct (R)	1
55~6	6089555-6	Speaker Grill Anchor	6
55~7	6089555-7	Fan Grill Anchor	2
55~8	6089555-8	LCD Transparent Piece	1
55~9	6089555-9	Water-resist Rubber	1
55~10	6089555-10	Book Rack	1
55~11	6089555-11	Console Bottom Cover	1
55~12	6089555-12	Fan Fixing Plate	2
55~13	6089555-13	Console Display Board	1
55~14	6089555-14	Interface Board	1
55~15	6089555-15	Key Board	1
55~16	6089555-16	400m/m_Fan Assembly(White)	1
55~17	6089555-17	300m/m_Speaker W/Cable	2
55~18	6089555-18	Amplifier Controller	1
55~19	6089555-19	300m/m_W/Receiver, HR	1
55~20	6089555-20	350m/m_Earphone socket with cable and securing metal	1
55~21	6089555-21	250m/m_Amplifier Cable	1

KEY NO.	PART NO.	DESCRIPTION	Q'TY
55~22	6089555-22	Bluetooth	1
56	6089556	Gear Motor	1
57	6089557	1000m/m_Sensor W/Cable	1
58	6089558	850m/m_Handpulse W/Cable Assembly	2
59	6089559	Power Cord	1
60	6089560	400m/m_Audio Cable	1
61	6089561	450m/m_Handle Wire (Upper), Resistance(White)	1
62	6089562	450m/m_Handle Wire (Upper), Incline(Red)	1
63	6089563	900m/m_Handle Wire (Lower), Resistance/Incline	2
64	6089564	Incline Controller	1
65	6089565	Incline Adaptor	1
66	6089566	Resistance Button W/Cable	2
67	6089567	1250m/m_Connecting Wire, Controller (Red)	2
68	6089568	2250m/m_Computer Cable	1
69	6089569	AC Input Module	1
70	6089570	650m/m_Computer Cable	1
71	6089571	80m/m_Connecting Wire (White)	2
72	6089572	200m/m_Ground Wire	1
73	6089573	Incline Motor	1
76	6089576	Sensor Rack	2
77	6089577	Ø65_Transportation Wheel	2
78	6089578	Ø78_Slide Wheel Urethane	4
79	6089579	Ø40_Adjustment Transportation Wheel	6
80	6089580	Ø38_Slide Wheel Urethane	12
81	6089581	Ø35 x 10m/m_Rubber Foot	6
82	6089582	WFM-2528-21_Bushing	4
83	6089583	WFM-1719-12_Bushing	4
84	6089584	J4FM-1719-09_Bushing	30
85	6089585	Ø330_Drive Pulley	1
86	6089586	Ø32(1.8T) Button Head Plug	2
87	6089587	Ø38 x 2.5T_Pedal End Cover	2
88	6089588	Ø32 x 2.0T_Round Cap	2
89	6089589	Ø40 x Ø80_Oval End Cap	2
90	6089590	Spacer Bushing	1
91	6089591	Ø24 x Ø10 x 3T_Nylon Washer (A)	2
92	6089592	5/16" x 25 x 3T_Nylon Washer	2
93	6089593	Ø45 x Ø35 x Ø26 x 10T_Isolator	2
94	6089594	Handle Switch Bracket	2
95	6089595	Speaker Grill Anchor	8

KEY NO.	PART NO.	DESCRIPTION	Q'TY
96	6089596	Oval End Cap	2
97	6089597	Switch Wire Cap	2
98	6089598	Ø13m/m_Bolt Cap	1
99	6089599	Slide Wheel Cover	2
100	60895100	Front Handle Bar Cover (L)	1
101	60895101	Rear Handle Bar Cover (L)	1
102	60895102	Front Handle Bar Cover (R)	1
103	60895103	Rear Handle Bar Cover (R)	1
104	60895104	Rear Stabilizer Cover (A)	2
105	60895105	Rear Stabilizer Cover (B)	2
106	60895106	End Cap Stopper	4
107	60895107	Pedal (L)	1
108	60895108	Pedal (R)	1
109	60895109	Pedal Foam (L)	1
110	60895110	Pedal Foam (R)	1
111	60895111	Console Mast Cover(L)	1
112	60895112	Console Mast Cover(R)	1
113	60895113	Side Case(L)	1
114	60895114	Side Case(R)	1
115	60895115	Side Case Plate(L)	1
116	60895116	Side Case Plate(R)	1
117	60895117	Side Case Rear Shroud	1
118	60895118	Circuit Cover	1
119	60895119	Connecting Arm Cover (L)(A)	1
120	60895120	Connecting Arm Cover (R)(A)	1
121	60895121	Connecting Arm Cover (L)(B)	1
122	60895122	Connecting Arm Cover (R)(B)	1
123	60895123	Frame Cover	2
124	60895124	Aluminum Axle End Cap	4
125	60895125	Left Slider Cover	1
126	60895126	Right Slider Cover	1
129	60895129	7 x 7 x 19L_Woodruff Key	2
130	60895130	3/8" x 2" _Flat Head Socket Bolt	6
131	60895131	1/4" x 3/4" _Hex Head Bolt	4
132	60895132	1/4" x 1/2" _Hex Head Bolt	4
133	60895133	5/16" x 1/2" _Hex Head Bolt	34
134	60895134	5/16" x 1-1/4" _Hex Head Bolt	2
135	60895135	5/16" x 2-1/2" _Hex Head Bolt	1
136	60895136	3/8" x 3/4" _Hex Head Bolt	2

KEY NO.	PART NO.	DESCRIPTION	Q'TY
137	60895137	3/8" x 2-1/4" _Hex Head Bolt	2
138	60895138	3/8" x 2-1/4" _Hex Head Bolt	6
139	60895139	3/8" x 3-3/4" _Hex Head Bolt	4
140	60895140	Ø10 x 40L _Incline Set Screws	1
141	60895141	Ø10 x 62L _Incline Set Screws	1
142	60895142	M8 x 20L _Socket Head Cap Bolt	2
143	60895143	M8 x 40L _Socket Head Cap Bolt	4
144	60895144	3/8" x 2-1/4" _Socket Head Cap Bolt	2
145	60895145	3/8" x 3/4" _ Socket Head Cap Bolt	6
146	60895146	5/16" x 1/2" _Button Head Socket Bolt	12
147	60895147	5/16" x 1-3/4" _Button Head Socket Bolt	10
148	60895148	M4 x 12L _Phillips Head Screw	2
149	60895149	M5 x 6L _Phillips Head Screw	12
150	60895150	M5 x 10L _Phillips Head Screw	4
151	60895151	M5 x 10L _Phillips Head Screw	16
152	60895152	M5 x 15L _Phillips Head Screw	24
153	60895153	3.5 x 12L _Sheet Metal Screw	20
154	60895154	4 x 15L _Sheet Metal Screw	10
155	60895155	5 x 19L _Tapping Screw	24
156	60895156	Ø3 x 20L _Tapping Screw	4
157	60895157	M5 x 20L _Flat Head Socket Screw	4
158	60895158	Ø25 _C Ring	2
159	60895159	Ø17 _C Ring	5
160	60895160	M4 x 5T _Nyloc Nut	2
161	60895161	M8 x 7T _Nyloc Nut	1
162	60895162	M8 x 9T _Nyloc Nut	1
163	60895163	M10 x 8T _Nyloc Nut	2
164	60895164	3/8" x 11T _Nyloc Nut	2
165	60895165	3/8" x 7T _Nyloc Nut	10
166	60895166	1/4" x 8T _Nyloc Nut	4
167	60895167	5/16" x 7T _Nyloc Nut	11
168	60895168	5/16" x 9T _Nyloc Nut	2
169	60895169	3/8" x UNF26 x 4T _	2
170	60895170	3/8" x UNF26 x 11T _	2
171	60895171	3/8" x 7T _Nut	12
172	60895172	M8 x 6.3T _Nut	6
173	60895173	M5 x P0.8 x 6L _Socket Head Cap Bolt	2
174	60895174	M8 x 155L _J Bolt	1
175	60895175	Ø3/8" x 30 x 2.0T _Flat Washer	2

KEY NO.	PART NO.	DESCRIPTION	Q'TY
176	60895176	Ø3/8" x Ø19 x 1.5T_Flat Washer	34
177	60895177	5/16" x 35 x 1.5T_Flat Washer	4
178	60895178	Ø8.5 x 26 x 2.0T_Flat Washer	10
179	60895179	5/16" x 23 x 1.5T_Flat Washer	20
180	60895180	Ø5/16" x Ø20 x 1.5T_Flat Washer	2
181	60895181	Ø17 x 23.5 x 1T_Flat Washer	1
182	60895182	Ø8 x Ø16 x 2T_Flat Washer	8
183	60895183	Ø25_Wave Washer	4
184	60895184	Ø17 x 0.5T_Wave Washer	8
185	60895185	M8 x 20L_Carriage Bolt	1
186	60895186	Ø10 x 2T_Spring Washer	4
187	60895187	Ø3/8" x 23 x 2T_Curved Washer	8
188	60895188	5/16" x 23 x 1.5T_Curved Washer	6
189	60895189	3/8" x 19L_Hex Head Bolt	4
190	60895190	5/16" x UNC18 x 15L_Hex Head Bolt	16
192	60895192	Phillips Head Screwdriver	1
193	60895193	L Allen Wrench	1
194	60895194	13/14m/m Wrench	1
195	60895195	12/14m/m Wrench	1
196	60895196	38 x 38L_Square End Cap	1
197	60895197	Conductive Terminal	2
202	60895202	Rubber Pad(Ø25.5xØ30x1T)	1

GENERAL MAINTENANCE

1. Wipe down all areas in the sweat path with a damp cloth after each workout.
2. If a squeak, thump, clicking or rough feeling develops the main cause is most likely one of two reasons:
 - I. The hardware was not sufficiently tightened during assembly. All bolts that were installed during assembly need to be tightened as much as possible. It may be necessary to use a larger wrench than the one provided if you cannot tighten the bolts sufficiently. I cannot stress this point enough; 90% of calls to the service department for noise issues can be traced to loose hardware.
 - II. The crank arm nut needs to be retightened
 - III. If squeaks or other noises persist, check that the unit is properly leveled. There are 2 leveling pads on the bottom of the rear stabilizer, use a 14mm wrench (or adjustable wrench) to adjust the levelers.

ENGINEERING MODE MENU

The console has built in maintenance/diagnostic software. The software will allow you to change the console settings from English to Metric and turn off the beeping of the speaker when a key is pressed for example. To enter the Engineering Mode Menu, press and hold down the Start, Stop and Enter keys. Keep holding the keys down for about 5 seconds and the Message Center will display Engineering Mode Menu. Press the Enter key to access the menu below:

1. KeyTest (Will allow you to test all the keys to make sure they are functioning)
2. LCDTest (Tests all the display functions)
3. Functions (Press **Enter** to access settings and **Up** arrow to scroll)
 - I. Display Mode (Turn off to have the console power down automatically after 20 minutes of inactivity)
 - II. Pause Mode (Turn on allow 5 minutes of pause, turn off to have the console pause indefinitely)
 - III. ODO Reset (Resets the odometer)
 - IV. Units (Sets the display to readout in English or Metric display measurements)
 - V. Beep (Turns off the speaker so no beeping sound is heard)
 - VI. DA Test (Tests the brake resistance)
4. Security (Allows the keypad to be locked to prevent unauthorized use)

Stride Calibration: If there is a problem with the stride, try running a calibration test. Press the Start key, Level up key & Stop key at the same time. Hold them down for 5 seconds and the stride calibration will start and run automatically. If the problem persists, contact the service department.

MANUFACTURER'S LIMITED WARRANTY

Dyaco Canada Inc. warrants all its elliptical parts for a period of time listed below, from the date of retail sale, as determined by a sales receipt. Dyaco Canada Inc.'s responsibilities include providing new or remanufactured parts, at Dyaco Canada Inc.'s option, and technical support to our independent dealers and servicing organizations. In the absence of a dealer or service organization, these warranties will be administered by Dyaco Canada Inc. directly to a consumer. The warranty period applies to the following components:

Warranty	Frame	Brake	Parts	Labour
Light Commercial (5 Hours use or less in a non-dues paying facility)	Lifetime	5 Years	3 Years	1 Year
Residential	Lifetime	Lifetime	10 Years	1 Year

This warranty is not transferable and is extended only to the original owner. The warranty shall not apply to exercise units which are (1) used for commercial or other income producing purposes, or (2) subject to misuse, neglect, accident or unauthorized repair and alterations.

This warranty provided herein is lieu of all other express warranties, any implied warranties, including any implied warranties of merchantability of fitness for particular purpose, are limited in duration to the first 12 months from date of purchase. All other obligations or liabilities, including liability for consequential damages are hereby excluded.

REPAIR PARTS AND SERVICE

All of the parts for the elliptical shown in figure can be ordered from Dyaco Canada Inc., 5955 Don Murie Street, Niagara Falls, Ontario L2G 0A9. When ordering parts, the parts will be sent and billed at the current prices. Prices may be subject to change without notice. Check or money order must accompany all orders. Standard hardware items are available at your local hardware store.

To ensure prompt and correct handling of any errors, or to answer any questions, please call our Toll Free number: 1-888-707-1880, or local number 1-905-353-8955 or fax 1-905-353-8968 or email customerservice@dyaco.ca or visit us at www.dyaco.ca Office hours are from 8:30 AM to 5:00 PM Monday to Friday Eastern Standard Time.

Always include the following information when ordering parts

- Model number
- Name of each part
- Part number of each part



Please visit us online for information about our other brands and products manufactured and distributed by Dyaco Canada Inc.



www.dyaco.ca



www.dyaco.ca



www.dyaco.ca



www.dyaco.ca



www.spiritfitnesscanada.ca

www.dyaco.ca



www.spiritfitnesscanada.ca

www.dyaco.ca



www.solefitness.ca

www.dyaco.ca



www.trainorsports.ca

www.dyaco.ca



www.xterrafitness.ca

www.dyaco.ca